


eS4500i e-Drive Unit

Features

- High-efficiency helical gears for extended electric driving range
- Wide range of gear reduction ratios to enable optimization of vehicle acceleration and top speed
- Adaptable motor flange interface and drop angle range
- Adapts across a broad range of vehicle applications
- Integral electronic ISO 26262 compliant parking mechanism
- System weight: 88 kg
- Speed: Single
- Reduction ratios: 14.88, 11.83, 10.86, 9.13, and 7.71
- Efficiency: Greater than 97%

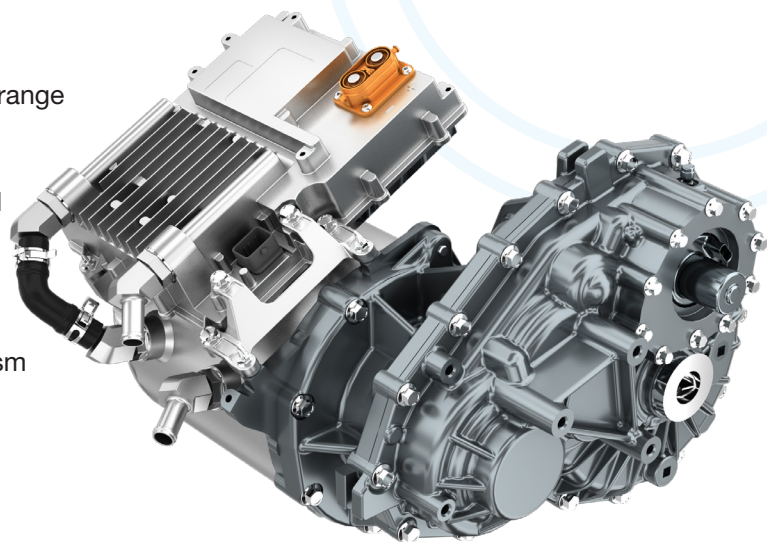

Ideal for Light Commercial Vehicles



Dana.com/Electrified

Application Policy

Capacity ratings, features, and specifications vary depending upon the model and type of service. Application approvals must be obtained from Dana; contact your representative for application approval. We reserve the right to change or modify our product specifications, configurations, or dimensions at any time without notice.